

Instrument Specifications

OR34 2 & 4 Channels Compact Analyzer



Table of Content

General description _____	3
Modules	3
Case _____	3
Mechanicals	3
Power supply	3
Environmental / Compliance with standards _____	4
Radio frequencies sensibility	4
Front-end _____	5
Dynamic inputs	5
Dynamic outputs	6
External sync	6
Digital computation _____	7
SPUs	7
Computation DSPs modules	7
Computation DSP module / OR34 unit	7
Notes _____	7

General description

The following specifications concern the OR34 analyzer. OR34 consists of a 3-Series hardware containing optional inputs and processing modules, a PC with an Ethernet interface and NVGate® software with optional plug-in analyzers.

Modules

The following tables detail the complete performances of OR34 hardware. Optional or standard modules may fill the described slots.

Front-end	Dynamic analog inputs	2 slots of 2 inputs (BNC)
	Dynamic analog outputs	1 output (BNC)
	Externals sync	2 trigger/tachometer inputs (BNC)
Processors	Trigger / tachometer / monitoring	1 DSP
	PC communication / recording	1 DSP
	Computation power	1 DSP
Miscellaneous	Remote control	1 with RS232 cable connection (RJ11)

Case

Mechanicals

Weight	1.4 kg (3 lb)	
Dimensions	Case (w.h.d)	45 mm x 205 mm x 154 mm (1.8 in x 8.1 in x 8.8 in)
	Overall (w.h.d)	54 mm x 215 mm x 163 mm (2.1 in x 8.4 in. x 6.4 in)

Power supply

Power	< 15 VA	
External AC Power supply	Voltage	100 to 240 VAC
	Frequency	47 to 63 Hz
DC	Range	10 V to 28 V
	Overload protection	31 V (over this voltage DC poles are short-circuited)
UPS (Uninterrupt-ible Power Supply)	Type	Internal NiMh battery (No memory effect)
	Protection against power supply loss or failure	15 min.

Environmental / Compliance with standards

CE	Indicates compliance with EMC Directive 89/336/EEC and Low Voltage Directive 73/23/EEC	
Safety	EN 61010-1 June 2001	Safety requirements for electrical equipment for measurement, control and laboratory use.
	Over-voltage Category	II (Local level mains, appliance, and portable equipment)
	Pollution Degree	2 : Do not operate in environments where pollutants may be present.
EMC Emission	EN 50081-1	Generic emission standard: Residential, commercial and light industry.
	EN 50081-2	Generic emission standard: Industrial environment.
	IEC 61326-A: 2002	Electrical equipment for measurement control and laboratory use EMC requirements. Industrial locations
	CISPR 22	Radio disturbance characteristics of information technology equipment. Class B limits.
	FCC Rules	Complies with the limits for a Class B digital device.
EMC Immunity	EN 50082-1	Generic immunity standard: Residential, commercial and light industry.
	IEC 61326-1	Electrical equipment for measurement control and laboratory use EMC requirements.
	EN 50082-2	Generic immunity standard: Industrial environment.
	Linear input response range on interference	Max slew rate on input: 5 V/ μs
Materials	ROHS	2011/65/EU
	WEEE	2002/96/CE – 2003/108/CE
Temperature	Operating	0°C to 50°C (32°F to 122°F)
	Storage	-20°C to 65°C (-4°F to 149°F)
	Absolute maximum rating [†]	-35°C to 70°C (-31°F to 158°F)
Humidity	Max	93 % RH at 40°C non-condensing
Shock	Complies with IEC 68-2-27	
	Operating	100 m/s² (11 ms, ½ sine) and 700 m/s² (3 ms, ½ sine)
	Storage	200 m/s² (11 ms, ½ sine) and 1 000 m/s² (3 ms, ½ sine)
	Absolute maximum rating [†]	1 000 m/s² (3 ms, ½ sine)
Vibration	Complies with IEC 68-2-6	
	Operating	20 m/s², 5-500 Hz, 5mm
	Storage	25 m/s², 5-500 Hz, 5mm
	Absolute maximum rating [†]	30 m/s², 5-500 Hz, 5mm
Bump	Complies with IEC 68-2-29	
	Storage	1000 bumps in each direction (6) at 400 m/s², 6 ms
Enclosure	Type	IP 40

Radio frequencies sensibility

	Input measured with 50 Ω terminator
Radiated RF: 80-1000 MHz, 80% AM 1 kHz, 10 V/m	< 20 μ V
Conducted RF: 0.15-80 MHz, 80% AM 1 kHz, 10 V	< 100 μ V
Magnetic field: 30 A/m, 50 Hz	< 2 μ V

Front-end

Dynamic inputs

Sampling	Frequencies (Additional decimators allow analysis bandwidth down to 0.8 Hz)	102.4 kHz, 65.536 kHz, 51.2 kHz, 37.768 kHz, 25.6 kHz, 16.384 kHz, 12.8 kHz, 8.192 kHz, 6.4 kHz, 5.12 kHz, 4.096 kHz, 3.2 kHz, 2.048 kHz
	Converters	One 24 bit sigma-delta ADC for each input
	Frequency relative precision	$0.5 \cdot 10^{-4}$ (typical $1 \cdot 10^{-5}$)
	Synchronization	All inputs synchronized on the same sampling clock
Anti-aliasing filter	Type	Over-sampled digital filters
	Slope	> 400 dB/octave
	Pass band ripple	< 0.003 dB
	Rejection of parasites bands	> 110 dB (@ frequency > 0.57 x FS)
	Effective bandwidth	0.43 x FS (ex: 23.2 kHz @ 51.2 kS/s)
Range (peak)	With amplifier (included)	±17.5 mV, ±31.6 mV, ±60 mV, ±100 mV, ±175 mV, ±316 mV, ±600 mV, ±1 V, ±1.75 V, ±3.16 V, ±6 V
	Direct	±10 V
Absolute accuracy	Resolution	24 bits (144 dB)
	All input ranges at 1 kHz	±0.05 dB (typical ±0.015 dB)
	Temperature variability	< 0.1 dB / 10°C
DC offset	For ranges from ±1 V to ±10 V	< ±0.15 % of full scale
	For ranges below ±1 V	< ±1 mV
Frequency flatness and phase response	Includes channel to channel match with different gains	
	10 V range, 0 to 20 kHz	±0.02 dB / ±0.02 °
	10 V range, 20 to 40 kHz	±0.05 dB / ±0.05 °
	175 mV to 6 V ranges, 0 to 20 kHz	±0.02 dB / ±0.1 °
	175 mV to 6 V ranges, 20 to 40 kHz	±0.10 dB / ±0.5 °
	17.5 mV to 100mV ranges, 0 to 10 kHz	±0.05 dB / ±0.3 °
	17.5 mV to 100mV ranges, 10 to 20 kHz	±0.1 dB / ±1 °
17.5 mV to 100mV ranges, 20 to 40 kHz	±0.4 dB / ±3 °	
Cross-talk	Between N (N is odd) and N+1 inputs: @ 1 kHz: < -112 dB , @ 20 kHz: < -86 dB , @ 40 kHz: < -80 dB	
	Between any inputs excluding: N (N is odd) and N+1 inputs: @ 1 kHz: < -122 dB , @ 20 kHz: < -96 dB , @ 40 kHz: < -90 dB	
Signal to noise ratio	With 50 Ω terminators:	
	10 V range, 40 kHz bandwidth: > 100 dB , spurious lines < -115 dB of full scale 10 V range, 20 kHz bandwidth: > 104 dB , spurious lines < -125 dB of full scale	
Input noise	With 50 Ω terminators	
	Thermal input noise	20 nV/√Hz
	17.5 mV range	20 kHz BW < 3 μV rms , 40 kHz BW: < 4.2 μV rms
	100 mV range	20 kHz BW < 3 μV rms , 40 kHz BW: < 4.2 μV rms
	1 V range	20 kHz BW < 5.4 μV rms , 40 kHz BW: < 8.5 μV rms
10V range	20 kHz BW < 44 μVrms , 40 kHz BW: < 70 μV rms	
Impedance	1 MΩ ±1%, < 100 pF	
Coupling	AC	Cut-off frequency 0.35 Hz ±10% (analog filter)
	DC	
	ICP	4 mA power supply with AC coupling
	ICP + TEDS	ICP with reverse current for TEDS reading
	AC and DC float	Independent ground references for each input within the current input range
GND	Shortcuts input poles to the ground	
Protection	On any inputs ⁱⁱ	±60 V peak without damage
TEDS	Standards	IEEE 1451.4 2001 revision 1
	Templates	Accelerometer/Force meter (25) Microphones (27, 28 and 29)
Dynamic	Spectral domain	> 120 dB

Dynamic outputs

Sampling	Converters	One 24 bits DAC for each output
	Synchronization	Same sampling clock as the dynamic inputs
Range	Direct	±10 V peak
	With attenuator (included)	±1 V peak
	Clipping	User selectable in the output range
	Digital gain	From 10⁻⁵ to 10³
Absolute accuracy	Resolution	24 bits (144 dB)
	All output ranges at 1 kHz	±0.05 dB
	Temperature drift	< 0.1 dB / 10°C
Frequency response	Variation relative to 0 dB at 1 kHz	
	All ranges, at 10 kHz	±0.05 dB
	All ranges, at 20 kHz	±0.15 dB
	All ranges, at 40 kHz	±0.8 dB
Noise floor level	10 V range, 20 kHz bandwidth	-110 dB of full scale, spurious lines < -125 dB of full scale
	10 V range, 40 kHz bandwidth	-105 dB of full scale, spurious lines < -125 dB of full scale
	1 V range, 20 kHz bandwidth	-99 dB of full scale, spurious lines < -110 dB of full scale
	1 V range, 40 kHz bandwidth	-94 dB of full scale, spurious lines < -110 dB of full scale
Impedance	Impedance	50 Ω
Current	Max	±10 mA
Protection	Sum of injected + generated voltages	±15 V peak , On any output ⁱⁱ Permanent short circuit supported
Total harmonic distortion	THD @ 1 kHz	< 0.002% or -94 dB at 20 kHz BW
	THD @ 5 kHz	< 0.005% or -86 dB at 20 kHz BW
Cross-talk	Output 0 dBV to 50 Ω terminated input	Lower than measurable noise

External sync

Sampling	Frequencies	64 times over-sampling of the current input sampling (up to 6.4 MHz)
	Converters	High speed voltage comparator and time counter
Range (peak)	Direct	±300 mV, ±1 V, ±3 V, ±10 V
threshold	Amplitude precision	±1 % of range
Setting	Hysteresis	1% (of input range) to input range
	Hold off	0 s to 500 s
	Slope	Rise or fall
	Hardwired pre-divider	From 1 to 255
Time resolution		> 160 ns (0.06° at 1kHz and 1.2 ° at 20kHz)
Pulse rate	Max	375k pulse/s
Coupling	AC	Cut-off frequency 0.35 Hz ±10% (analog filter)
	DC	
Impedance		1 MΩ, < 100 pF
Protection	on any external sync ⁱ	±60 V peak without damage

Digital computation

The following table details the optional DSP modules that can be added to OR34 hardware to fit analysis mode calculation needs.

SPUs

SPU (Signal Processing Units): the following table gives the characteristics of each analysis mode and the associated SPU consumption. For multi-analysis purpose, add the corresponding SPUs of each mode used simultaneously and increase the sum by 10%. "Real-time" means that the analysis speed is faster than the input rate and does not miss any sample.

FFT	Real-time FFT analysis with:
	401 lines (for 801, 1601,3201, 6401 lines multiply requested SPU respectively by 1.25,1.5, 2, 3)
	20 kHz bandwidth (Requested SPU are proportional to bandwidth)
	0% overlap 1 channel processing = 1 SPU
1/n Octave	Real-time filter based 1/n octave analysis with:
	1/3rd octave resolution (for 1/12 th and 1/24 th octave multiply SPU respectively by 2 and 4)
	20 kHz bandwidth (Requested SPU are proportional to bandwidth)
	1 channel processing = 3 SPU
Order analysis	Real-time order spectrum analysis (re-sampled time signal) with:
	Max order / order resolution = 800
	Max RPM x Max order = 1 200 000 (requested SPU is proportional to max RPM)
	1 channel processing = 3 SPU
Recorder	Gap free recording with:
	51.2 kHz sampling rate
	1 channel processing = 1 SPU

Computation DSPs modules

Type	Sample size	32 bit floating
	Computation words	32/40 bits
	Memory	4 MSamples
Power	Computation capability	12 SPU / DSP module

Computation DSP module / OR34 unit

Minimum	1 Computation DSP module	12 SPU
Maximum	2 Computation DSP modules	24 SPU

Notes

The above specifications describe all the guaranteed capacities and performances of the instrument and are applicable to an OR34-4 hardware, powered for more than 15 minutes, at a stabilized room temperature of 23°C ±5°C and calibrated since less than one year.

The adapted control software NVGate® is described separately.

ⁱ Prepared for future use: the related specifications or options are in development.

ⁱⁱ Exceeding absolute maximum ratings damages the system and voids guarantee.

OROS, Leadership through Innovation

About Us

OROS designs and manufactures noise and vibration testing systems (instruments and software) for more than 30 years, meeting the requirements and expectations of automotive, aerospace, marine energy & process, manufacturing and automation industries. French company with worldwide scope (80% of turnover with 2 subsidiaries, 6 offices, 8 maintenance centers and representatives in more than 35 countries), OROS is a dynamic company where innovation is at the heart of its strategy to offer a range of high-tech products and solutions. OROS covers data acquisition, structural dynamics, acoustics and rotating applications as well as a range of related services.

Our Philosophy

Reliability and efficiency are our ambition everyday. We know you require the same for your measurement instruments: comprehensive solutions providing performance and assurance, designed to fit the challenges of your demanding world.

Our Emphasis


Continuously paying attention to your needs, OROS collaborates with a network of proven scientific affiliates to offer the latest of the technology, always based on innovation.

Worldwide Presence

OROS solutions are marketed in more than 35 countries, through our authorized network of representatives, offices and accredited maintenance centers.

Want to know more?

OROS Headquarters	OROS Inc	OROS French Sales Office	OROS GmbH	OROS China TStech
Tel: +33.476.90.62.36	Tel: +1.888.200.0ROS +1.703.478.3204	Tel: +33.169.91.43.00	Tel: +49.261.133.96.50	Tel: +86.10.59892134
Mail: info@oros.com Web: www.oros.com	Mail: info@orosinc.com Web: www.oros.com	Mail: info@oros.fr Web: www.oros.fr	Mail: info@oros-deutschland.com Web: www.oros-deutschland.com	Mail: info@oroschina.com Web: www.oroschina.com

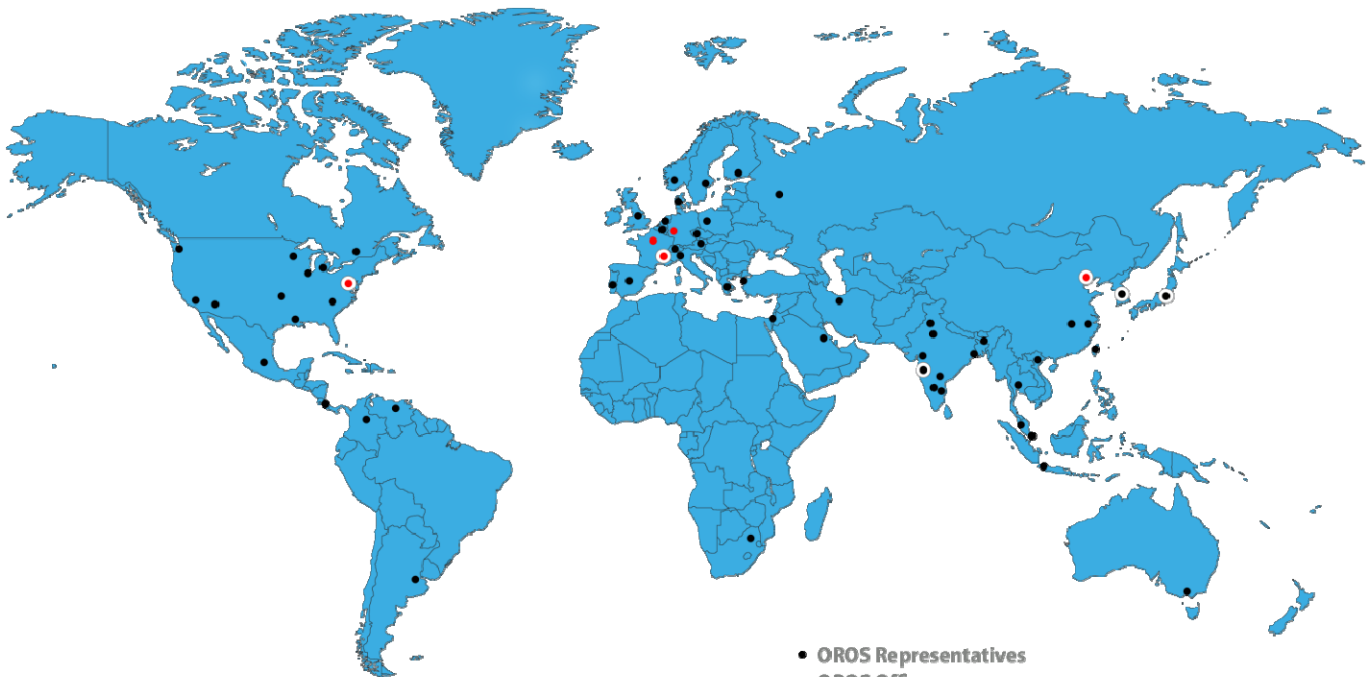

- OROS Representatives
- OROS Offices
- ⊙ OROS Maintenance Centers

